


# Install/Replace Carryout® Handle

If installing a Carryout handle for the first time, remove the two screws nearest the holes for the coax and power connectors on the base and use these screws to install the handle. Tighten all of the dome screws using a Phillips screwdriver.

If replacing a Carryout handle, using a Phillips screwdriver, remove the two screws holding the damaged handle to the base. Use these screws to install the new handle. Tighten screws.

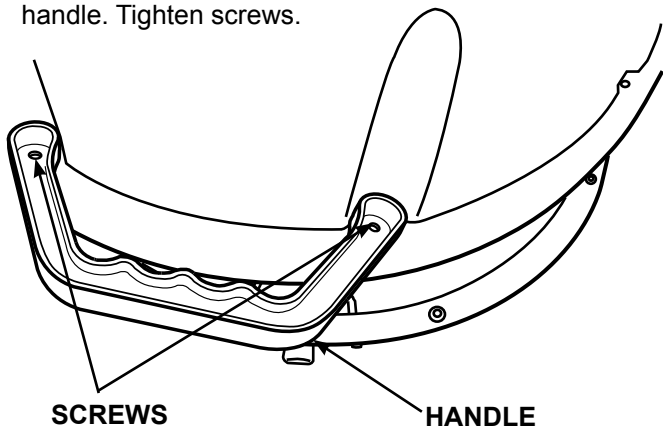

**WINEGARD®**

Winegard Company • 3000 Kirkwood St. • Burlington, IA 52601

800/288-8094 • Fax 319/754-0787 • [www.winegard.com](http://www.winegard.com)

© Winegard Company 2009 2452178 Rev. 1/10