

WINEGARD®

Model RD-9901 Remote Control Wall Plate (For use with Winegard Model RD-9946/RD-9960) Installation/Operation

INSTALLATION

To install the RD-9901, proceed as follows:

1. Connect the 25' telephone cord to the REMOTE CONTROL PANEL plug on rear of positioner. See Figure 1.

NOTE: The RD-9901 will fit into a standard electrical outlet box.

2. Connect other end of telephone cord to plug on side of RD-9901. See Figure 1.
3. Secure RD-9901 with screws provided.

OPERATION

NOTE: All commands will be shown in bold with brackets, example [SELECT A].

The Remote Control Wall Plate allows you to "hide" the positioner and still operate the system. Figure 2 (back page), shows the remote panel controls and operations.

NOTE: The Remote Control Wall Plate will not work if the positioner is performing/accessing any menu. Example; City menu, Manual Movement, Edit Menu, etc.

To search for the satellite using the remote control wall plate proceed as follows:

1. Turn TV ON and tune to channel 3 or 4 (output channel of receiver).
2. Press **[POWER]** on receiver remote to turn satellite receiver on. Determine correct elevation angle by entering the ZIP for your location into receiver (refer to receiver manual).
3. Press **[+/-]** elevation buttons until you have the correct elevation angle, Figure 2.
4. Press **[SEARCH]** button to begin search routine. Both LED's will light while antenna is moving. Just the

Positioner Rear Panel

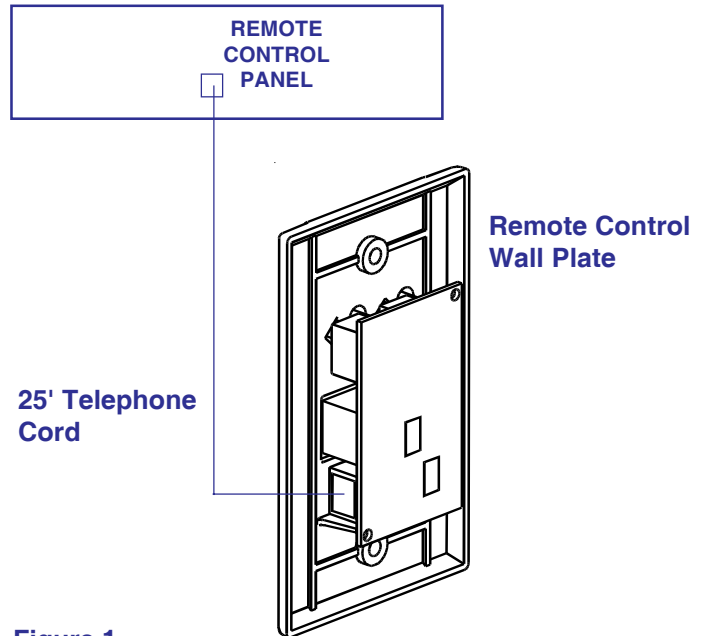


Figure 1

search LED will light when the satellite is found.

NOTE: If the wrong satellite was found press [SEARCH] to start the search routine again.

NOTE: If both LED's go out, the system has not found a satellite. Verify that you have entered correct angle and that there is a clear view of the satellite.

To park the antenna from the remote control panel, press **[PARK]** button. See Figure 2. Both LED's will light while antenna is moving, only the park LED will stay lit once the antenna is in the park position. To stop the park routine press **[PARK or SEARCH]** button.

NOTE: Remote Control Wall Plate will not work if the positioner is performing/accessing any menu.

**Remote Control Wall Plate Panel
Model RD-9901**

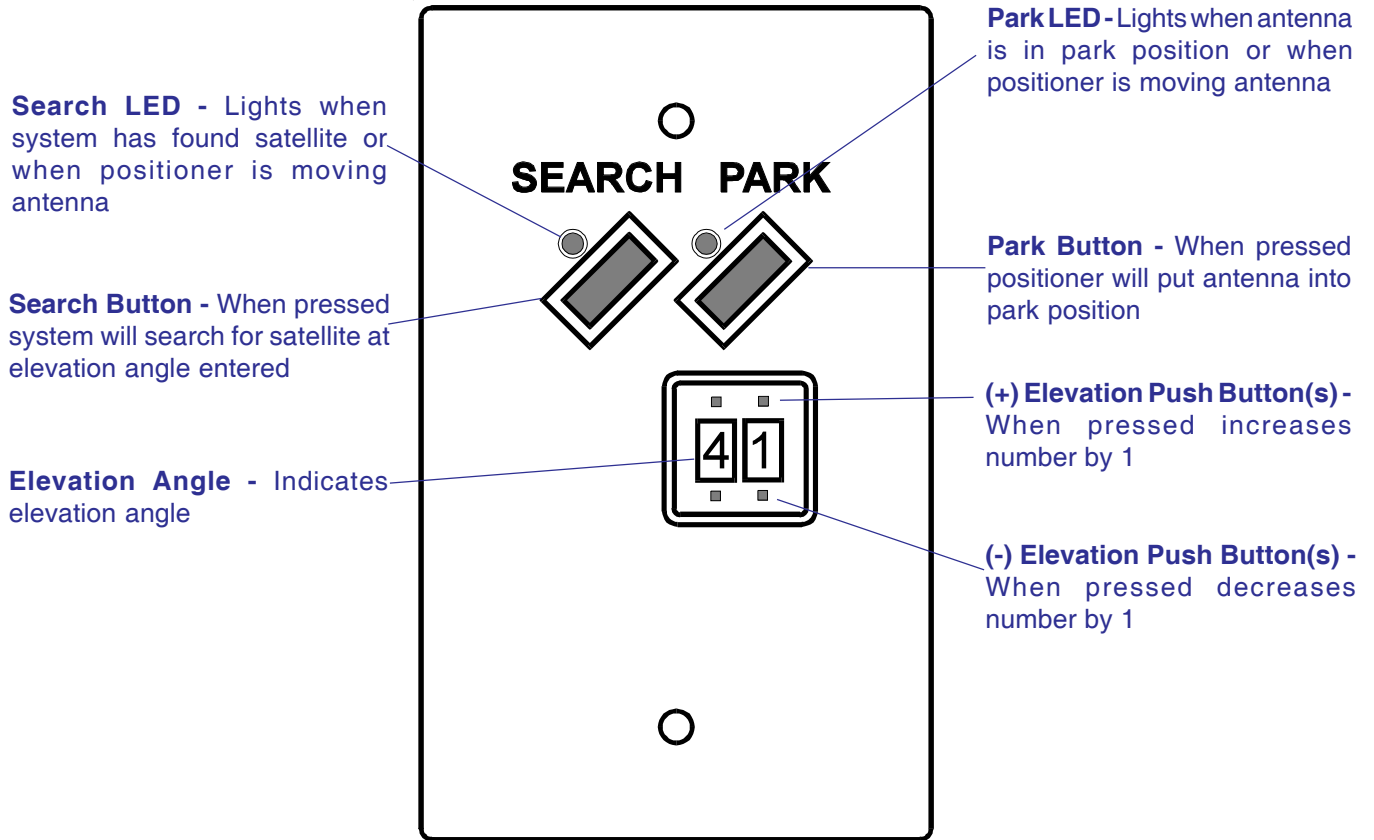


Figure 2